


WashBayLITE

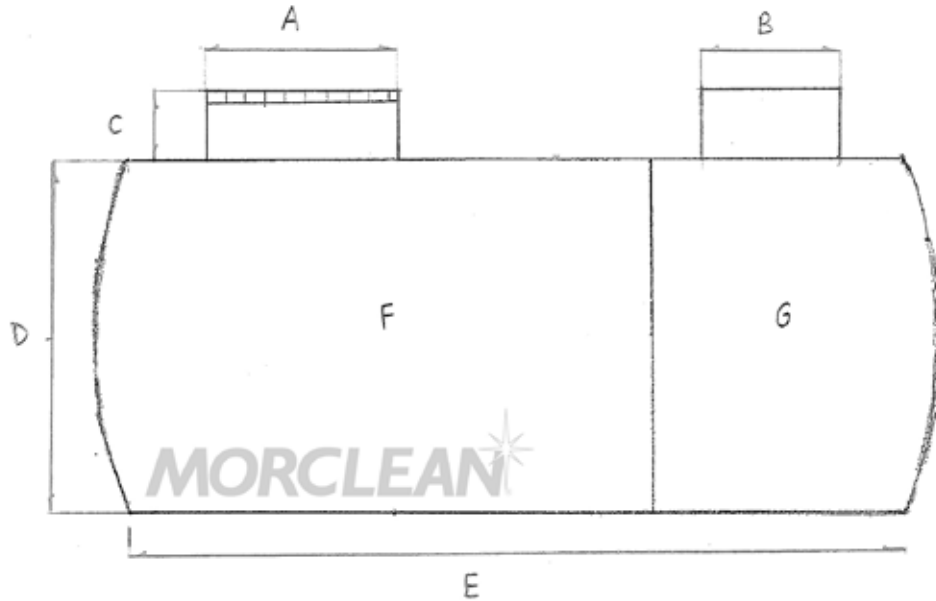

The wash bay Lite is a combination wash bay interceptor and sump and silt trap, ideal for smaller car wash sites. The galvanised grating provides a collection point and sump while the below ground interceptor offers an additional 2 stages of settlement.

Water from the wash bay typically outflows by gravity to the 1M x 1M surface area of the galvanised gratings which are made to B125 standard suitable for cars and light vehicles entering the wash bay.

The outflow then enters 2 stages of settlement prior to discharge to a mains foul drain. Ideal for lighter uses in car wash applications the Washbay Lite is designed to reduce the outlay, purchase price, installation and civil costs in a very competitive market place and offers a single tank solution all in one package.

All Washbay Lite combination interceptors are built in 2,000Ltrs capacity which provides sufficient settlement for car wash applications and the additional access chamber is housed under a standard 600mm cover and lid (not included).

Dimensions

| | |
|-----------------------------------|-----------------------|
| A Length of Silt Trap (mm) | 1000 |
| B Access Turret to Chamber (mm) | 600 |
| C Height of Silt Trap (mm) | 500 |
| D Intereceptor Circumference (mm) | Capacity Dependant |
| E Length (mm) | |
| F First Stage Chamber | |
| G Second Stage Chamber | |

**CALL NOW,
FREE ON 0800 1300 402**
for more information.

